


Number of Points _____
 Maximum Temperature _____
 Maximum Pressure _____
 What material is most compatible? _____

Positive "K" Conductor is placed as center wire.
 Negative "K" Conductor is placed as outer wires.
 The out Negative conductors are attached to the center Positive conductor at _____ points.

First point can be with in 1/4" of Tip.

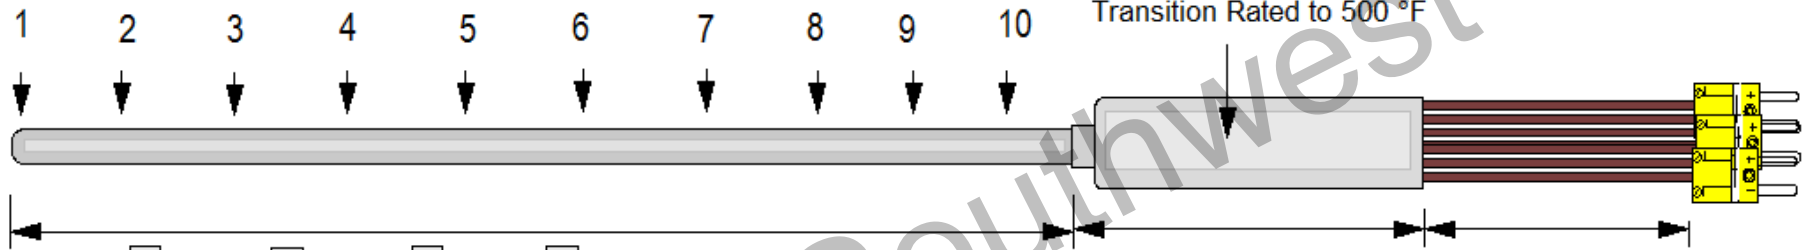


- 0.125" 0.188" 0.25" 0.3125" Dia. x _____"
- 316 SS Metal Sheath Rated Up to 1600 °F
- Inconel 600 Metal Sheath Rated Up to 2000 °F


- 1.0" Dia. x 6" Transition
- _____ ft. of
- 24 AWG Teflon Leads
- 20 AWG Teflon Leads
- No Connectors
- Mini-Male Connectors
- Standard Male Connectors

Specify # of Point and Spacing from Tip

- 1 = _____"
- 2 = _____"
- 3 = _____"
- 4 = _____"
- 5 = _____"
- 6 = _____"
- 7 = _____"
- 8 = _____"
- 9 = _____"
- 10 = _____"



Type K
 Ungrounded Isolated Junctions
 Hard Packed MgO Insulation.

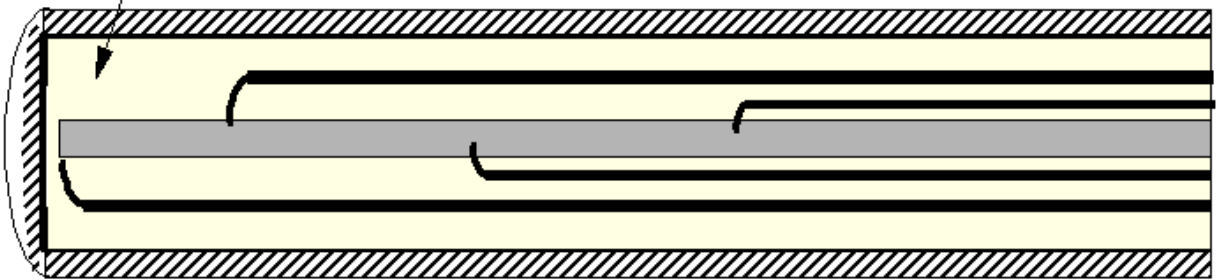

NOT SCALE DRAWING

All dimensions in inches unless specified
 NOTE: This drawing contains proprietary information, must not be copied/distributed without proper consent from ThermX Southwest.

Dwg Made Approved	Draftman	Checker	Engineer
Initial			JS
Date			11/12/2015

THERMX SOUTHWEST
 858-573-0983

Multi-Point Type "K" Thermocouple

_____ Dia. x _____" x _____ Point

Drawing No.: **TX-10TBD**

REV. No.
A